

## HS 1200

CONFIGURED

## METAL SHEET, SLIDING WING | FH

**PAYLOAD**  
up to 1,200 kg**PLATE SIZE**  
1,200 x 800 x 3 mm**OVERALL HEIGHT**  
max. 1,150 mm


The mobile work table with a load capacity of 1,200 kg is used in various areas of production and maintenance. The compact design made of high-quality steel profiles and the well thought-out construction give the lifting table a very high level of stability

Platform	1,200 x 800 mm
Useful stroke	700 mm
Height of the lifting table	450 mm
Weight	approx. 215 kg
Ball-bearing support rollers	ø 150 mm
2 swivel castors with brakes and 2 fixed castors	

ART.: 194.100.00

STEPLESS  
AND UNDER LOAD  
HEIGHT ADJUSTABLE  
WITH THE HELP OF  
FOOT HYDRAULICS



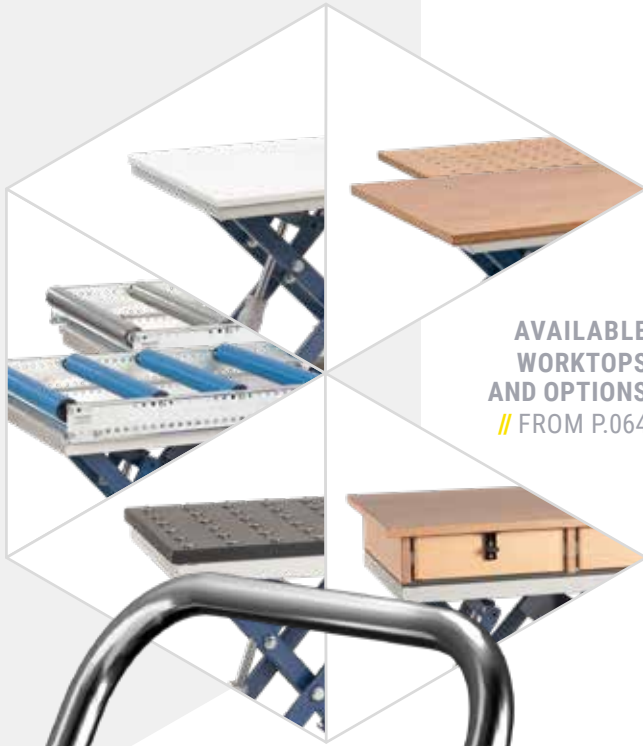

AVAILABLE  
WORKTOPS  
AND OPTIONS  
// FROM P.064



EQUIPMENT // FROM P.111

# HS 1200 OPTIONS

## WORKTOP SELECTABLE

Every craftsman needs a height-adjustable lifting table – robust work table, well thought-out design and versatile accessories. Beck products stand for a high-quality design combined with many years of experience and practical solutions. Individually selectable accessories enable future-oriented further development of workplaces



### BEECH MULTIPLEX WORKTOP

Suitable for HS 1200, attached to the platform, the plate is coated with linseed oil

Platform	1,250 x 800 x 30 mm
Weight	approx. 24 kg

ART.: 200.101.00




### BEECH MULTIPLEX PERFORATED GRID PANEL

Suitable for HS 1200, attached to the platform, the plate is coated with linseed oil

Plate size	1,250 x 800 x 30 mm
Hole diameter	ø 22 mm
Hole grid spacing	T = 100 mm
Weight	approx. 23 kg

ART.: 200.102.00

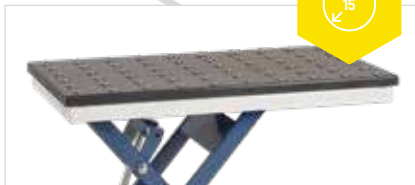

### BALL ROLLER TABLE TOP SMOOTH WITHOUT BARS

Suitable for HS 1200, screwed onto the platform, castors in hardened socket

Platform size	1,200 x 800 x 3 mm
Ball transfer units	ø 15 mm
Ball roller pitch	T = 100 mm
Load capacity per ball transfer unit	50 kg
Weight	approx. 34 kg

ART.: 200.117.00



### BALL ROLLER TABLE TOP SMOOTH WITH BARS ON ALL SIDES

Suitable for HS 1200, screwed onto the platform, removable web strips, castors in hardened socket

Platform size	1,200 x 800 x 3 mm
Ball transfer units	ø 15 mm
Ball roller pitch	T = 100 mm
Load capacity per ball transfer unit	50 kg
Web height	20 mm
Weight	approx. 36 kg

ART.: 200.118.00



### METAL GRID PLATE

Suitable for HS 1200, screwed onto the platform, for use in assembly work and as a welding plate for filigree welding work, surface: phosphated

Platform size	1,200 x 800 x 65 mm
Material thickness	4 mm
Hole diameter	ø 28 mm
Diagonal grid	T = 100 mm
Side plate	65 mm high
Weight	approx. 48 kg

ART.: 200.115.00

## RECOMMENDATION!



### BATTERY-HYDRAULIC DRIVE WITH HAND SWITCH FOR UP/DOWN

Suitable for HS 1200, the drive unit is built into the floor frame in a closed sheet metal tray, construction height increases by 60 mm

Aggregate	12 V
Tank	4,7 l
Battery pack (maintenance-free, including charger and 230 V schuko plug)	12 V / 38 BH
Hand switch for up/down with 3 m long cable	
Weight	approx. 45 kg

ART.: 200.351.00



### HAND SWITCH WITH SPIRAL CABLE

Instead of normal cables, cable length: 2 m


ART.: 200.349.00



### RADIO CONTROL FOR BATTERY HYDRAULICS

Wireless operation for up/down including emergency stop button

ART.: 190.151.00

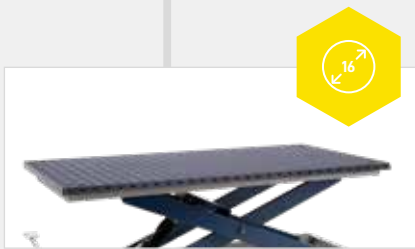

## STEEL PERFORATED GRID PLATE

Suitable for HS 1200, made of high-quality steel, mechanically processed with high accuracy, corrosion-resistant and long-lasting wear protection thanks to plasma-nitrided surface, for use in assembly work and as a welding plate for filigree welding work, plate construction reinforced by cassette-shaped welded web plates

Material thickness	approx. 11.5 – 13 mm
Bores	with a radius of 2 mm
Corners and edges	with a radius of 3/6 mm
Hole diameter	ø 16 mm
Grid	50 x 50 mm

### 16B SYSTEM WITH 50 MM SIDE WALLS

Plate size	1,200 x 800 x 50 mm
Side plate	50 mm high
Hole spacing side plate	50 mm
Weight	approx. 106 kg

ART.: 200.400.16

### SYSTEM16 WITH 100 MM SIDE WALLS

Plate size	1,200 x 800 x 100 mm
Side plate	100 mm high
Hole spacing side plate	25 mm
Weight	approx. 128 kg

ART.: 200.212.16

### SYSTEM28 WITH 200 MM SIDE WALLS

Plate size	1,200 x 800 x 200 mm
Side plate	200 mm high
Hole spacing side plate	50 mm
Weight	approx. 340 kg

ART.: 200.431.28



## WE ALSO OFFER SPECIAL SOLUTIONS

Call, advise, be happy – we are there for you for technical information, advice or special requests. We are constantly developing our product range according to the needs of our customers.

 **FEEL FREE TO CONTACT US WITHOUT OBLIGATION:**

by phone: +49 (0)7576 962978-0

by email: [info@beck-maschinenbau.de](mailto:info@beck-maschinenbau.de)

FOLLOW US

   @beck\_maschinenbau



**HOKUBEMA**  
Maschinenbau GmbH

**PANHANS**  
QUALITÄT SEIT 1918

**SIITEC**  
SICHERHEITSTECHNIK



FOLLOW US

   @beck\_maschinenbau



**SHOWROOM  
TEST,  
EXPERIENCE,  
FALL IN LOVE ...**

Our showroom in Sigmaringen (Southern Germany) is a permanent product presentation where you can try out our products and machines.

Just visit us!

**Reinhold Beck Maschinenbau GmbH**  
Im Grund 23 | 72505 Krauchenwies | Germany  
phone. +49 (0)7576 962978-0  
info@beck-maschinenbau.de  
**www.beck-maschinenbau.com**

 **AVAILABLE ONLINE AT:** [www.hokubema.com](http://www.hokubema.com)

YOUR SPECIALIST DEALER:



**MADE IN GERMANY**