

HS 300 STANDARD

WITHOUT WORKTOP | FH



PAYLOAD
up to 300 kg



PLATFORM SIZE
970 x 590 mm




OVERALL HEIGHT
max. 1,010 mm

The workplace of the future is mobile, height-adjustable under load and can be used individually like the HS 300. Different worktops can be placed on the base frame of the standard design and thus individualized for every industry and every area of application.

Useful stroke	610 mm
Height of the lifting table	400 mm
Weight	approx. 70 kg
4 swivel castors (wheel ø 125 mm), 2 of which have brakes	


ART.: 190.020.00

STEPLESS
AND UNDER LOAD
HEIGHT ADJUSTABLE
WITH THE HELP OF
FOOT HYDRAULICS



3

2

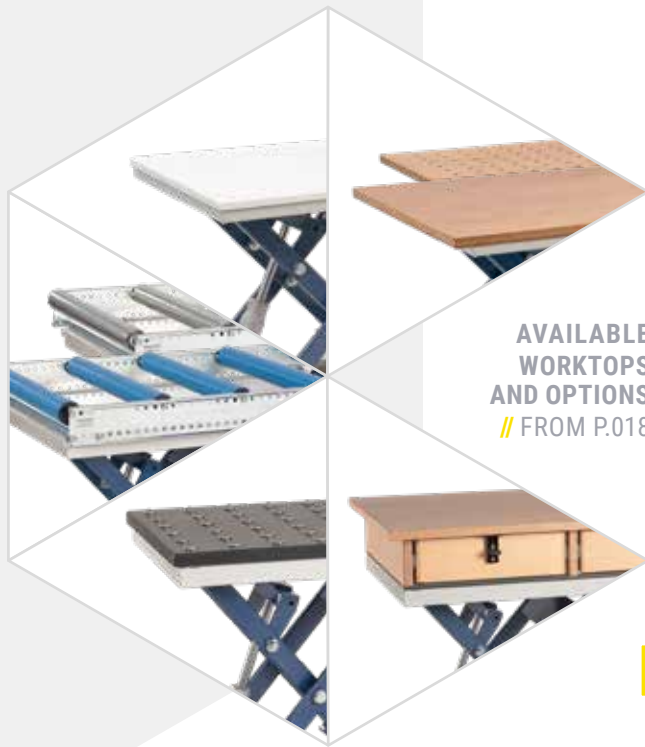

AVAILABLE
WORKTOPS
AND OPTIONS
// FROM P.018

HIGHLIGHT
THAT MAKES THE HS 300 SPECIAL:



The design of the scissor construction offers maximum stability thanks to the square profiles.



The screw connection of the scissor construction is reinforced throughout.



Two of the four swivel castors are equipped with parking brakes.



The locking lever blocks / secures your Lifting table mechanically at normal height.

EQUIPMENT // FROM P.111

HS 300 STANDARD OPTIONS

WORKTOP SELECTABLE

The purpose of use determines the correct consistency of the worktop. At Reinhold Beck Maschinenbau GmbH is the worktop freely selectable. In this way, workflows and requirements can be individually optimized.

We can provide you with a worktable with a wide variety of worktops for your industry-specific work process and area of application.



METAL WORKTOP

Suitable for HS 300, simply screwed on platform

Platform	1,000 x 600 x 3 mm
Color	Light gray RAL 7035
Weight	approx. 14 kg

ART.: 200.090.00

CONFIGURED // P.020


WORKTOP AW 100 SMOOTH

Suitable for HS 300, can be attached to the platform

Platform	1,250 x 800 x 21 mm
Weight	approx. 14 kg

ART.: 200.100.00



BEECH MULTIPLEX WORKTOP

Suitable for HS 300, can be attached to the platform, the plate is coated with linseed oil

Platform	1,250 x 800 x 30 mm
Weight	approx. 24 kg

ART.: 200.101.00



BEECH MULTIPLEX PERFORATED GRID PANEL

Suitable for HS 300, can be attached to the platform, the plate is coated with linseed oil

Platform	1,250 x 800 x 30 mm
Hole diameter	ø 22 mm
Hole grid spacing	T = 100 mm
Weight	approx. 23 kg

ART.: 200.102.00



BEECH MULTIPLEX WORKTOP WITH 2 DRAWER BOXES

Suitable for HS 300, 2 drawer boxes, on both sides extendable with spring bolt lock, screwed onto the platform

Platform	1,050 x 680 x 160 mm
Internal drawer dimensions	590 x 390 x 100 mm
Weight	approx. 30 kg

ART.: 200.103.00



WORKTOP BIRCH MULTIPLEX, HPL-COATED ON BOTH SIDES

Suitable for HS 300, can be attached to the platform

Platform	1,250 x 800 x 30 mm
Color	White RAL 9016
Weight	approx. 25 kg

ART.: 200.104.00



BIRCH MULTIPLEX PERFORATED GRID PANEL, HPL-COATED ON BOTH SIDES

Suitable for HS 300, can be attached to the platform

Platform	1,250 x 800 x 30 mm
Hole diameter	ø 22 mm
Hole grid spacing	T = 100 mm
Color	White RAL 9016
Weight	approx. 24 kg


ART.: 200.105.00



VERSATILE EQUIPMENT FOR PERFORATED GRID PANELS

Whether clamping, gluing, pressing, grinding, polishing – a wide variety of operations can be carried out on your lifting table with little effort. Hole grid plates with accessories offer optimal solutions.

EQUIPMENT // FROM P.111

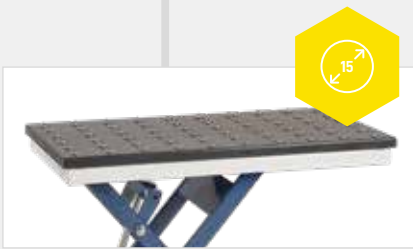


BALL ROLLER TABLE TOP SMOOTH WITHOUT BARS

Suitable for HS 300, can be attached to the platform, castors in hardened socket

Platform size	1,000 x 610 x 3 mm
Ball transfer units	ø 15 mm
Ball roller pitch	T = 100 mm
Weight	approx. 34 kg

ART.: 200.107.00

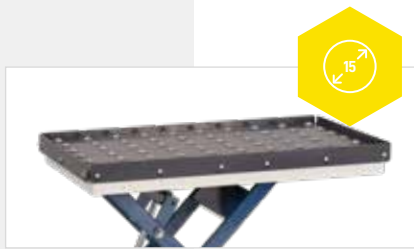

BALL ROLLER TABLE TOP SMOOTH WITH BARS ON ALL SIDES

Suitable for HS 300, can be attached to the platform, web strips can be removed, castors in hardened socket

Platform size	1,000 x 610 x 3 mm
Ball transfer units	ø 15 mm
Ball roller pitch	T = 100 mm
Web height	20 mm
Weight	approx. 36 kg

ART.: 200.119.00



METAL GRID PLATE

Suitable for HS 300, screwed on platform, for use during assembly work and as welding plate for filigree welding work, surface: phosphated

Platform size	1,200 x 800 x 65 mm
Material thickness	4 mm
Hole diameter	ø 28 mm
Diagonal grid	T = 100 mm
Side plate	65 mm high
Weight	approx. 48 kg

ART.: 200.115.00



HIGHROLLER CONVEYOR WITH PLASTIC SUPPORT ROLLERS, BALL BEARINGS

Suitable for HS 300 Standard with sheet metal plate, attachable to sheet metal plate

Track length	1,000 mm
Track width	700 mm
Plastic rollers	ø 63 mm
Pitch	250 mm
Weight	approx. 25 kg

ART.: 200.122.00



ROLLER CONVEYOR WITH STEEL SUPPORT ROLLERS, BALL BEARINGS

Suitable for HS 300 Standard with sheet metal plate, attachable to sheet metal plate

Track length	1,000 mm
Track width	700 mm
Steel rollers	ø 60 mm
Pitch	250 mm
Weight	approx. 30 kg

ART.: 200.124.00



BOOK BARS, 2 PIECES

With pressed-in magnets for fixing on the sheet metal plate

Beech strips	50 x 50 mm
Length	1,100 mm
Weight	approx. 3 kg

ART.: 200.112.00



STAINLESS STEEL WORKTOP SMOOTH

Suitable for HS 300, for mounting on platform, 20 mm bevel all around, with handles on the narrow side

Platform size	1,200 x 750 x 2 mm
Weight	approx. 16 kg

ART.: 200.108.00



SLIDING WING

Suitable for HS 300, to be screwed to the base frame

Weight	approx. 5 kg
--------	--------------

ART.: 200.109.00



DIRECTIONAL STOP

Direction lock for swivel castor, 1 piece

The direction stop turns the swivel castor into a fixed castor

The steering direction is stabilized

Weight	approx. 1 kg
--------	--------------

ART.: 200.001.00

HS 300 STANDARD

CONFIGURED
SHEET METAL | FH

PAYLOAD
up to 300 kg

PLATE SIZE
1,000 x 600 x 3 mm

OVERALL HEIGHT
max. 1,010 mm

Useful stroke	610 mm
Overall height of the lifting table	400 mm
Weight	approx. 70 kg
4 swivel castors (wheel ø 125 mm), 2 of which have brakes	

ART.: 190.100.00

STEPLESS
AND UNDER LOAD
HEIGHT ADJUSTABLE
WITH THE HELP OF
FOOT HYDRAULICS


FOOT

BATTERY

ELECTRIC

MOBILE

THE ECONOMIC GAIN:

- + Optimally equipped workstations ensure motivated employees
- + More safety due to high-quality and stable work tables
- + Adjusted work table height reduces additional work steps
- + High-quality materials and design for a long service life
- + Posture that is harmful to the back is avoided

HS 300 STANDARD

WITHOUT WORKTOP | BH



PAYLOAD
up to 350 kg



PLATE SIZE
970 x 590 mm



OVERALL HEIGHT
max. 1,050 mm

Useful stroke	610 mm
Height of the lifting table	440 mm
Weight	approx. 100 kg
Lifting time	7 s
Hand button up/down	
4 swivel castors (wheel ø 125 mm), 2 of which have brakes	

ART.: 190.150.00

CONFIGURED



**AVAILABLE
WORKTOPS
AND OPTIONS**
// FROM P.018

STEPLESS
AND UNDER LOAD
HEIGHT ADJUSTABLE
WITH THE HELP OF
BATTERY HYDRAULICS



RADIO CONTROL FOR BATTERY HYDRAULICS

Wireless operation for up/down
including emergency stop button

ART.: 190.151.00



FOLLOW US

   @beck_maschinenbau



HOKUBEMA
Maschinenbau GmbH

PANHANS
QUALITÄT SEIT 1918

SIITEC
SICHERHEITSTECHNIK



FOLLOW US

   @beck_maschinenbau



**SHOWROOM
TEST,
EXPERIENCE,
FALL IN LOVE ...**

Our showroom in Sigmaringen (Southern Germany) is a permanent product presentation where you can try out our products and machines.

Just visit us!

Reinhold Beck Maschinenbau GmbH
Im Grund 23 | 72505 Krauchenwies | Germany
phone. +49 (0)7576 962978-0
info@beck-maschinenbau.de
www.beck-maschinenbau.com

 **AVAILABLE ONLINE AT:** www.hokubema.com

HOKUBEMA
Maschinenbau GmbH

PANHANS
QUALITÄT SEIT 1918

SIITEC
STRICHTECHNOLOGIE



MADE IN GERMANY

YOUR SPECIALIST DEALER: