HS 500

METAL SHEET, SLIDING HANDLE | **FH**







PLATE SIZE 1,100 x 700 x 3 mm




OVERALL HEIGHT max. 940 mm

The robust design of the HS 500 with sheet metal plate and push handle is ideal for toolmaking. A special highlight: the foot pedal can be folded away to the side – for more safety both during operation and at work.

Useful stroke	540 mm
Height of the lifting table	400 mm
Weight	approx. 148 kg
Ball-bearing support rollers	ø 150 mm
2 swivel castors (wheel ø 150 mm) with castors	n brakes and 2 fixed

ART.: 192.100.00

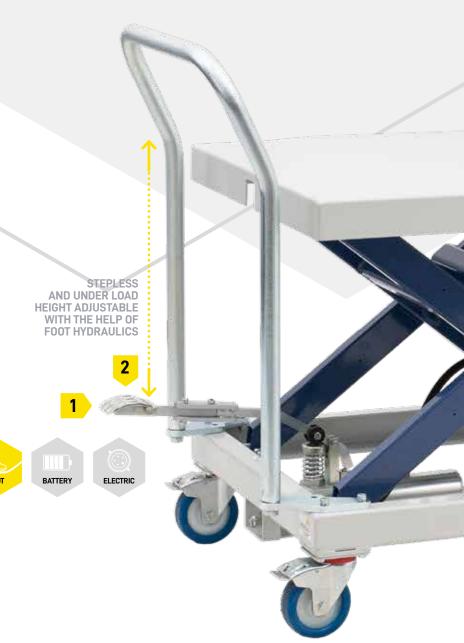



HIGHLIGHT THAT MAKES THE HS 500 PARTICULARLY:



Foot pedal can be folded away on both sides Prevent injuries.



The construction enables a smooth running adjustment of the working height.



Manageable size of the work table and a high load capacity of up to 500 kg.



Lifting table can be moved smoothly even under load thanks to a robust construction.

EQUIPMENT //FROM P.111

HS500 OPTIONS

WORKTOP SELECTABLE

The condition of the worktop depends on the workflow and the requirements of the work environment. At Reinhold Beck Maschinenbau GmbH, the worktop is freely selectable. A wide variety of panels are available for optimal processing. We provide you with a work table with a worktop for your industry-specific work process



WORKTOP AW 100 SMOOTH

Suitable for HS 500, attached to the platform

Platform	1,250 x 800 x 21 mm
Weight	approx. 14 kg

ART.: 200.100.00



BEECH MULTIPLEX WORKTOP

Suitable for HS 500, attached to the platform, the plate is coated with linseed oil

Platform	1,250 x 800 x 30 mm	
Weight	approx. 24 kg	

ART.: 200.101.00



BEECH MULTIPLEX PERFORATED GRID PANEL

Suitable for HS 500, attached to the platform, the plate is coated with linseed oil

Platform	1,250 x 800 x 30 mm
Hole diameter	ø 22 mm
Hole grid spacing	T = 100 mm
Weight	approx. 23 kg

ART.: 200.102.00



WITHOUT BARS

Suitable for HS 500, screwed onto the platform, castors in hardened socket

Platform size	1,200 x 800 x 3 mm
Ball transfer units	ø 15 mm
Ball roller pitch	T = 100 mm
Load capacity per ball transfer unit	50 kg
Weight	approx. 34 kg

ART.: 200.117.00







BALL ROLLER TABLE TOP SMOOTH WITH BARS ON ALL SIDES

Suitable for HS 500, screwed onto the platform, removable web strips, castors in hardened socket

Platform size	1,200 x 800 x 3 mm
Ball transfer units	ø 15 mm
Ball roller pitch	T = 100 mm
Load capacity per ball transfer unit	50 kg
Web height	20 mm
Weight	approx. 36 kg

ART.: 200.118.00

STEEL PERFORATED GRID PANEL **16B SYSTEM**

Suitable for HS 500, made of high-quality steel, mechanically processed with high accuracy, corrosion-resistant and more durable, wear protection thanks to the plasma nitrided surface, for use in assembly work and as a welding plate for filigree welding work, plate construction through cassette-shaped welded, reinforced web plates

1,200 x 800 x 50 mm
approx. 11.5 – 13 mm
mm
a radius of 3/6 mm
ø 16 mm
50 x 50 mm
50 mm high
50 mm
approx. 106 kg

ART.: 200.400.16



METAL GRID PLATE

Suitable for HS 500, screwed onto the platform, for use in assembly work and as a welding plate for filigree welding work, surface: phosphated

Platform size	1,200 x 800 x 65 mm
Material thickness	approx. 4 mm
Hole diameter	ø 28 mm
Diagonal grid	T = 100 mm
Side plate	65 mm high
Weight	approx. 48 kg

ART.: 200.115.00



















Our showroom in Sigmaringen (Southern Germany) is a permanent product presentation where you can try out our products and machines.

Just visit us!

Reinhold Beck Maschinenbau GmbH

Im Grund 23 | 72505 Krauchenwies | Germany phone. +49 (0)7576 962978-0 info@beck-maschinenbau.de www.beck-maschinenbau.com

X AVAILABLE ONLINE AT: www.hokubema.com

HOKUBEMA







